
214 natural oak | I31 is produced in all foils



18 mm

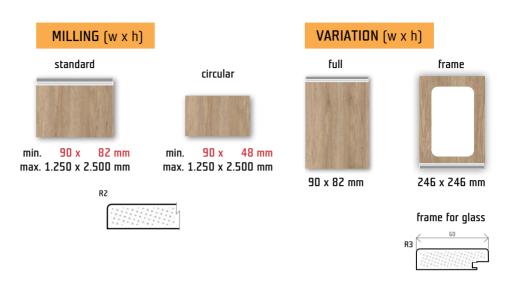

drawing for the hand E31

Note:

For classic opening door is recommended to keep the gap between the body and door 2 mm on the left and right side. We also recommend to use Blum hinges with opening angle of 100 or 110 degrees for loaded and loaded door. Following these two recommendations there is a problem with opening. For the control of the body and doors we recommend using the damping lenses Häfele.

When ordering I31, always specify the total height required (including the handle)

Dimension reduction by the height of the handle is automatic during the product preparation process

Handle specification:

material: aluminium | surface: brushed aluminium

Handle not included (must be ordered separately).

We do not supply screws for the handle, we recommend 3.5×15 mm screws.

The handle can be painted (comaxit) in 14 selected RAL shades in matt finish.

Direction of growth rings: up to 319 mm (incl.) - horizontal, growth rings direction may be changed on request.

Overview of RAL shades for powder coating (comaxit) in matt finish.

