

PROTECTIVE HEAT SHIELD

T.classic

T.lacq

T.acrylic

T.segment

T.effect⁺

FENIX NTM[®]

GLAKS

PROTECTION OF CABINET DOORS FROM EXCESSIVE HEAT EXPOSURE

T.classic doors come with an eight-year warranty against hidden defects. One such defect is delamination, where the foil separates from the core panel. Statistics show that in 95% of delamination cases, the issue is not caused by the product itself but by improper installation. The solution to this problem lies in the installation of a simple accessory – a protective heat shield.

The critical area where excessive heat exposure can occur is around the ovens of built-in stoves. In addition to creating a protective structural gap between the stove and the doors, we recommend installing two special steel strips – the protective heat shield – inside the cabinet. This measure is both time- and cost-efficient while being entirely effective.



We offer the heat shield in two designs, differing in the profile of the metal strips and surface finish, but they are functionally equivalent.

The heat shield is primarily designed for T.classic foil-coated doors but can, of course, be used for other Trachea doors as well.

The heat shield „Z” profile




The heat shield „L” profile

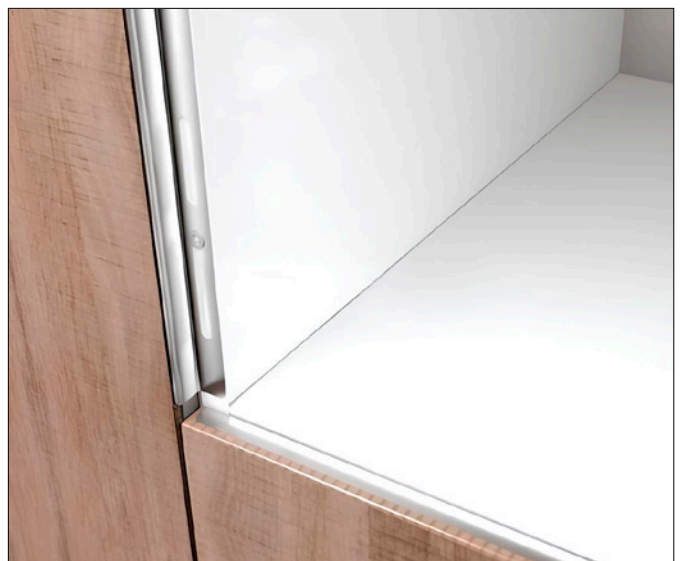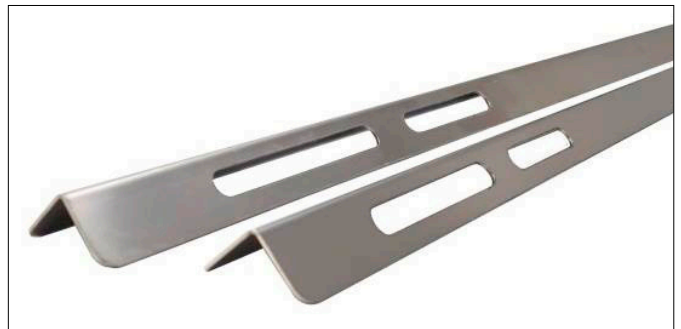


PROTECTION OF CABINET DOORS FROM EXCESSIVE HEAT EXPOSURE

Mounting scheme and „Z“ profile dimensions

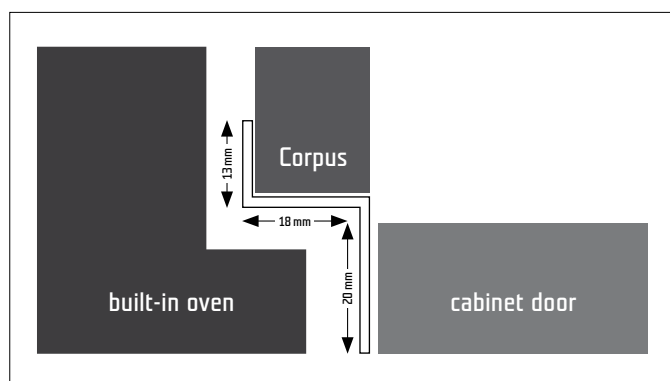


Mounting scheme and „L“ profile dimensions

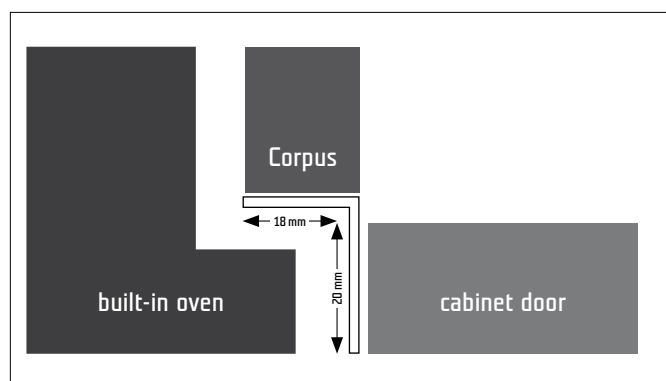

Color „Z“ profile



Color „L“ profile

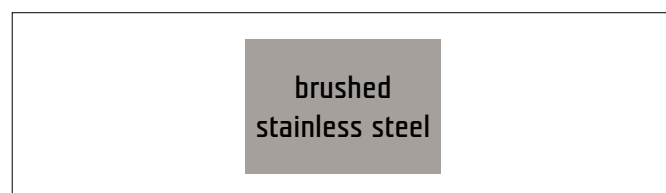

Detail of the seated oven – the shield is virtually invisible



| Marking | Implementation |
|---|-------------------------|
| Protective heat shield – 2x „Z“ profile | aluminium |
| Protective heat shield – 2x „Z“ profile | white (RAL 9003 – matt) |
| Protective heat shield – 2x „Z“ profile | black (RAL 9005 – matt) |
| Protective heat shield – 2x „L“ profile | stainless steel |

Installation instructions are on the website WWW.TRACHEA.CZ/EN in the SERVICE chapter, Technical documents section.